

UNIT OF MEASURE in. [mm] SCALE 1" = 1' 25.4mm = 304mm

864685 SHEET 1 OF 2 5.0L MPI/350 MAG MPI/MX 6.2 MPI MULTI-POINT DRAIN

NOTES:


- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) INNER AND OUTER SURFACES OF TRANSOM MUST BE PARALLEL WITHIN 1/8 in. (3mm) IN AREA COVERED BY TRANSOM PLATES AND REMAIN WITHIN TRANSOM THICKNESS LIMITS.
- (3) REFER TO "TRANSOM CUTOUT" IN INSTALLATION MANUAL TO FIND CRANKSHAFT CENTERLINE VS. BOAT BOTTOM.

864685 SHEET 2 OF 2 5.0L MPI/350 MAG MPI/MX 6.2 MPI MULTI-POINT DRAIN

NOTES:

(1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
(2) SELECT THE APPROPRIATE EXHAUST RISE—HEIGHT TO MAINTAIN A MINIMUM OF 13 in. (330mm)
BETWEEN THE TOP OF THE EXHAUST ELBOW AND THE WATERLINE OF THE BOAT AT MAXIMUM RATED LOAD.

> **SCALE** UNIT OF MEASURE 1" = 1' in. [mm] 25.4mm = 304mm

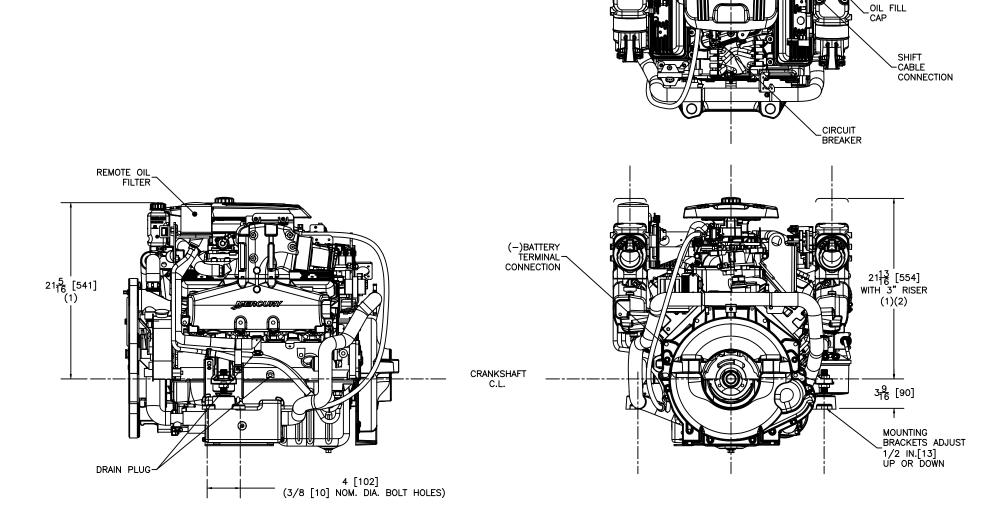

ELECTRICAL BRACKET